

CR2/3AL

Lithium Manganese Dioxide
(Li-MnO₂) Cylindrical Batteries




Features and benefits

- Superior long-term reliability.
- High current pulse discharge capacity.
- High safety and energy density.

Specifications

■ Nominal Voltage	3.0V
■ Nominal Capacity* ¹	1600mAh
■ Max. Discharge Current* ²	1000mA
■ Max. Pulse Current	2000mA
■ Standard Discharge Current	2.5mA
■ Operating Temperature* ³	-40 ~ +70°C
■ Approx. Weight	17.0g

Dimensions


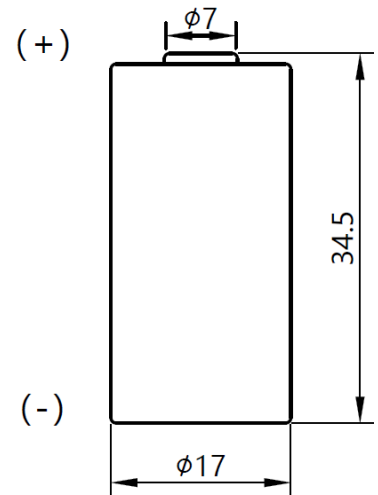


*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at 20±3°C;

*2 Current value for obtaining 1.5V cell voltage, discharge capacity reach 50% of the nominal capacity;

*3 Consult EVE when using batteries at temperature exceeding the -10°C ~ +40°C range.

Performance

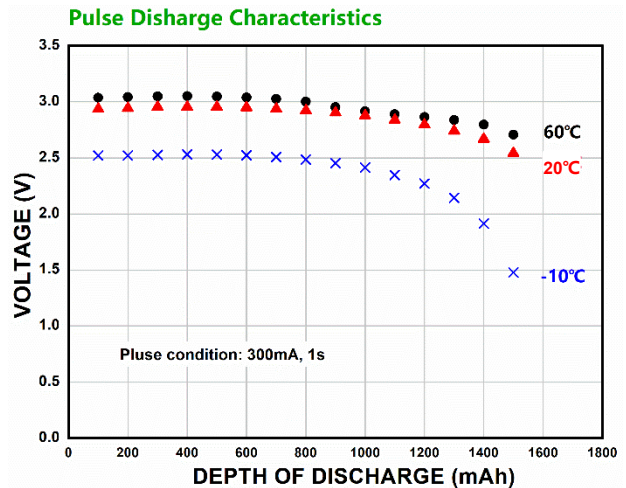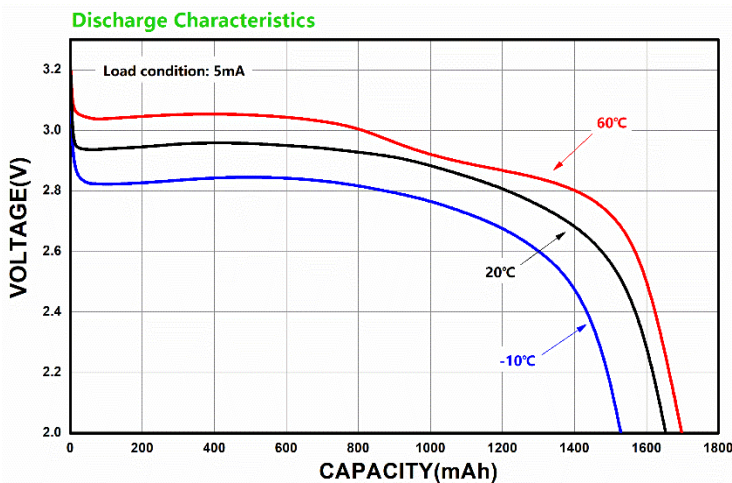

NOTICE

- Any representations in this data sheet concerning performance are for informational purpose only and are not construed as warranties, either express or implied of future performance.
- Cell and battery designs/specifications are subject to modification without notice, contact EVE for the latest information.

EVE ENERGY CO., LTD

Address: NO.38, Hui Feng 7th Road, Zhongkai Hi-Tech Zone, HuiZhou, Guangdong, China

Operator: (86-752) 260 6966

Direct: (86-752) 260 5822

Fax: (86-752) 260 6033

P.C. 516006