

CR17335


Lithium Manganese Dioxide(Li-MnO₂) Batteries

Specifications







■ Nominal Voltage	3.0V
■ Nominal Capacity* ¹	1600mAh
■ Max. Discharge Current* ²	700mA
■ Max. Pulse Current* ³	2000mA
■ Standard Discharge Current	5mA
■ Operating Temperature* ⁴	-40 ~ +85°C
■ Approx. Weight	17g

Dimensions

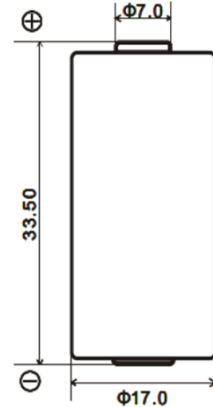

*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at 20±3°C.
 *2 Current value is determined to be the level at which 50% of the nominal capacity is obtained with an end voltage of 1.0V at +23°C.
 *3 Current value for obtaining 1.0V cell voltage when pulse is applied for 3s at 50% discharge depth at +23°C.
 *4 Consult EVE when using batteries at temperature exceeding the -20°C ~ +40°C range.

Performance (Typical values for cells stored for one year or less, at 25°C)

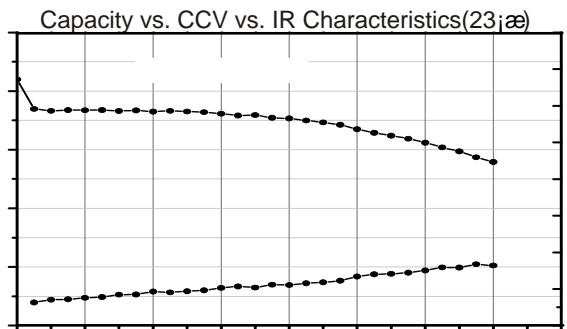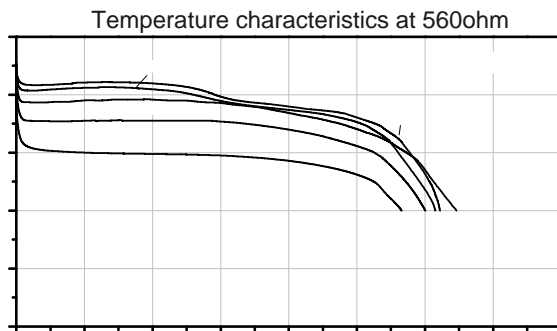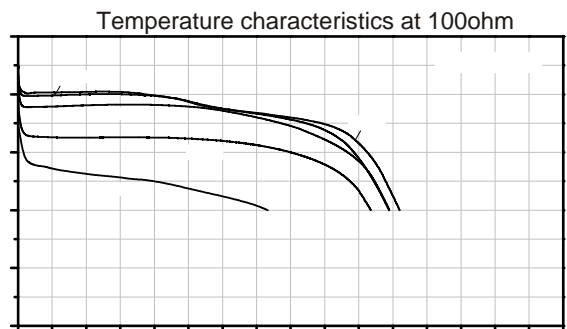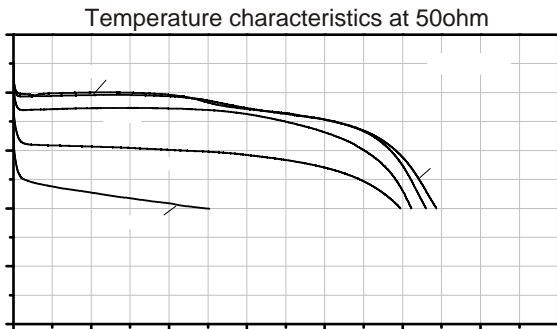

NOTICE

- Any representations in this data sheet concerning performance are for informational purpose only and are not construed as warranties, either express or implied of future performance.
- Cell and battery designs/specifications are subject to modification without notice, contact EVE for the latest information.

EVE ENERGY CO., LTD

Address: NO.38, Hui Feng 7th Road, Zhongkai Hi-Tech Zone, HuiZhou, Guangdong, China

Operator: (86-752) 260 6966

Direct: (86-752) 260 5822

Fax: (86-752) 260 6033

P.C. 516006